

Banner Specifications:


Standard width: 88 cm
Other widths available on request

Length of banner: 146-226 cm (Single sided)
161-241 cm (Double sided)

Visible print height: Less 2 cm

Prepare graphic:

Attach 2 self adhesive strips to back of graphic (top and bottom). Slide strips into slot of aluminium rails and insert end caps.

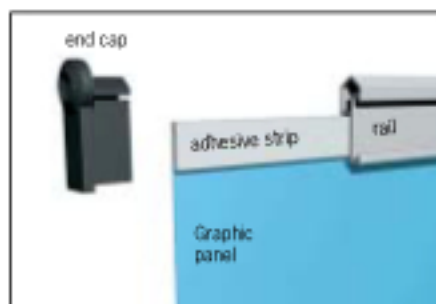

During transport of the stand, please use the cardboard tube to pack the graphic. Always slide the banner out of the aluminium rails before packing it into the tube. **Please observe: Never roll the graphic banner around the aluminium rails, since this can damage the banner.**

IMPORTANT! Roll laminated banners **print-side out**.
Roll non-laminated banners **print-side in**.


Mounting instruction



1 Attach bottom rail support to base, opposite the Mark Bric logo



2 Attach pole to base

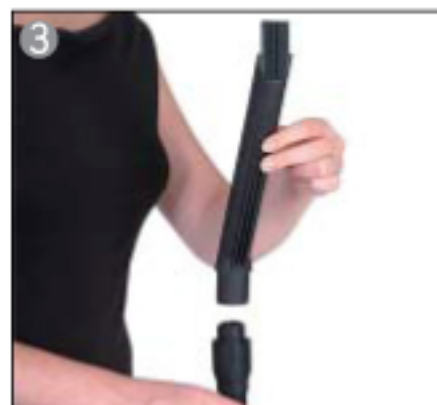

3 Attach top rail support



4 Attach bottom rail



5 Attach top rail



6 Raise top section of pole to apply tension, twist anti-clockwise to lock in place (clockwise to unlock).



7 Finished!

Double sided



Double sided display uses 2 rail supports on bottom instead of base, as well as 2 rail supports on top.